


DATE	ECN	REVISION RECORD	DR	CK
01/29/08	8054	ADD CUSTOMER CLEAR CHANNEL DIMS	BB	BN

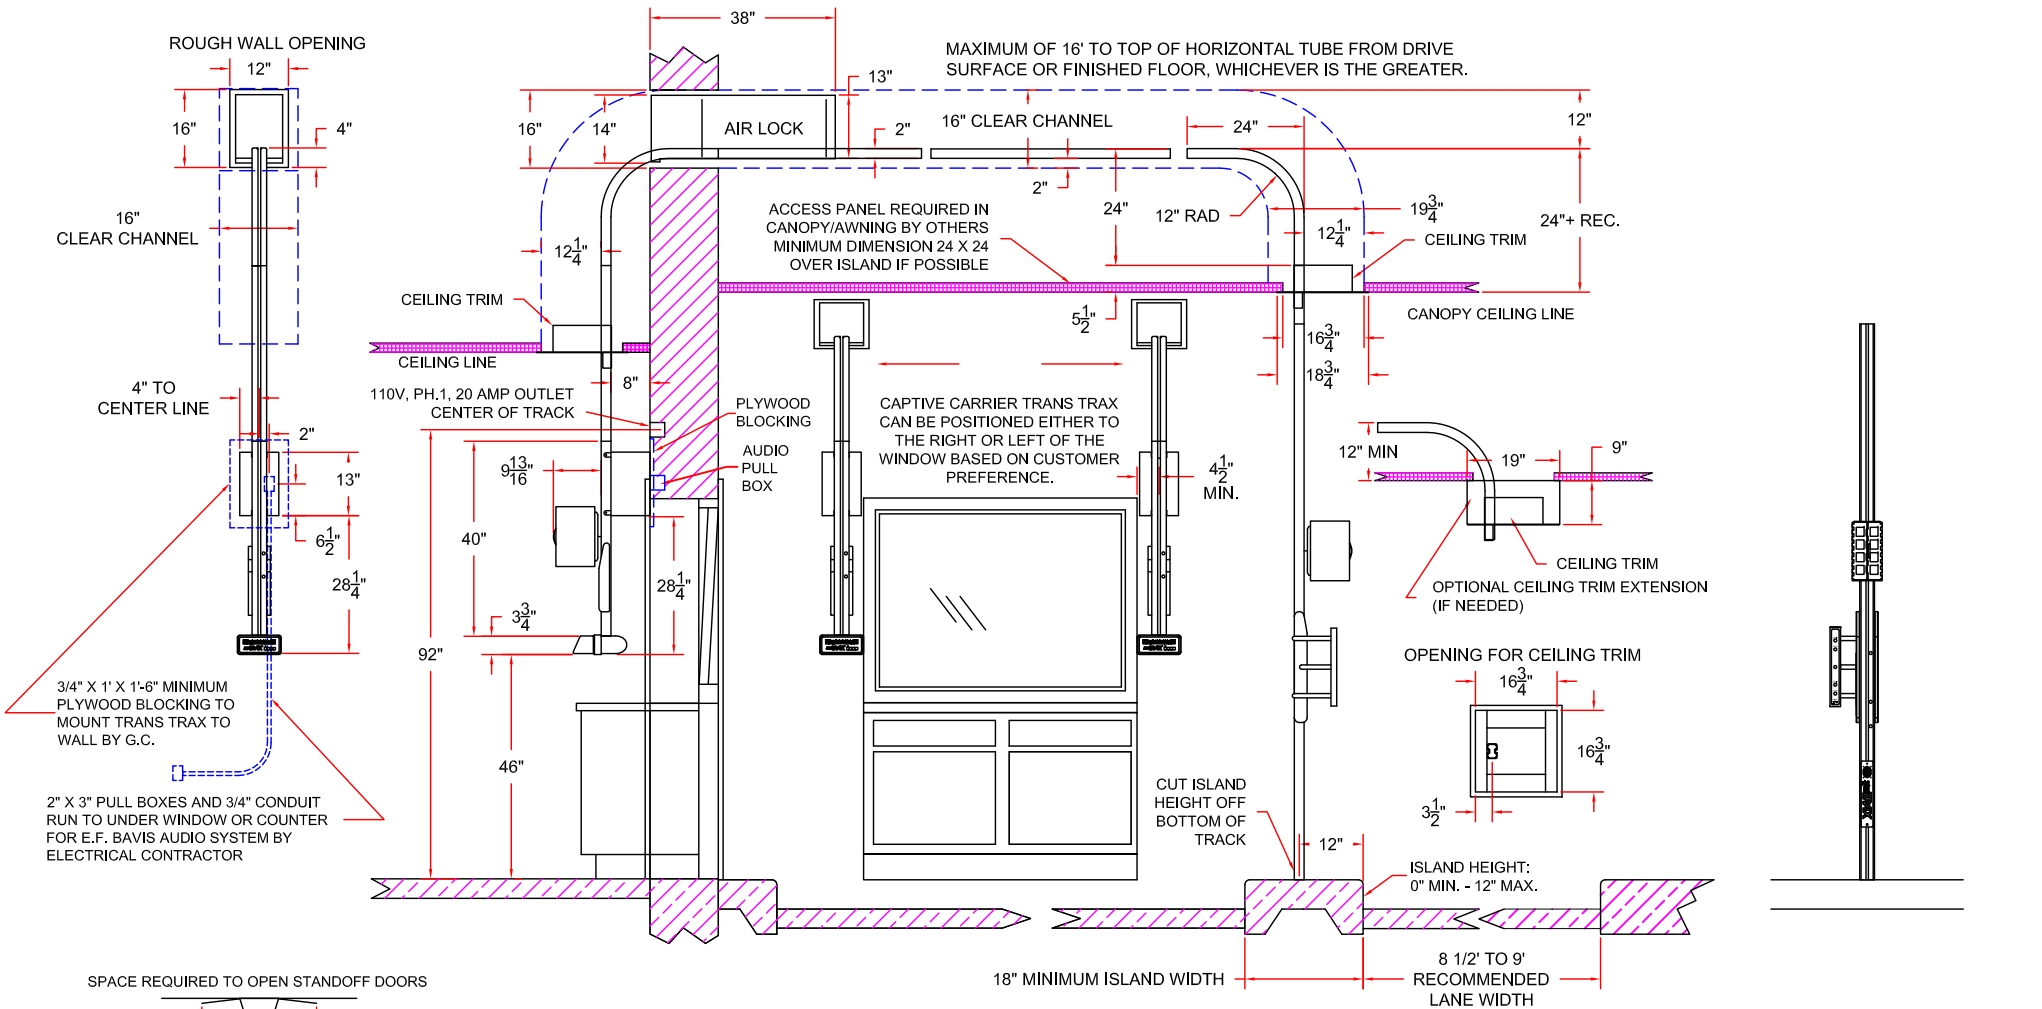

RECOMMENDED MINIMUM - MAXIMUM HORIZONTAL LENGTH:  
 MIN. C-L TO C-L OF VERTICALS: 32"  
 MAX. C-L TO C-L OF VERTICALS: 33' 10"

HORIZONTAL TUBE SHOULD HAVE A SUPPORT EVERY 10' CAPABLE OF 150 LBS.

IF THE HORIZONTAL TUBE IS USED UN-CUT IN THE HORIZONTAL, THERE ARE ENOUGH SUPPLIES TO POSITION THE TOP OF THE HORIZONTAL TUBE 12' 4" ABOVE THE DRIVEWAY SURFACE.

MINIMUM HEIGHT FROM FINISHED FLOOR TO THE TOP OF THE HORIZONTAL TUBE 9' 5-3/4", (113-3/4").

CAPTIVE CARRIER WIRED FOR BAVSONIC AUDIO  
 04921992 - 20 FT OF HORIZONTAL TUBE  
 04921993 - 30 FT OF HORIZONTAL TUBE

CAPTIVE CARRIER WIRED FOR AUDIO AUTHORITY AUDIO  
 04922992 - 20 FT OF HORIZONTAL TUBE  
 04922993 - 30 FT OF HORIZONTAL TUBE

**PROPRIETARY**  
 THIS DOCUMENTATION AND INFORMATION CONTAINED ARE THE SOLE PROPERTY OF E.F. BAVIS & ASSOC., INC. IT SHALL BE RETURNED UPON REQUEST AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART, OR DISCLOSED TO ANYONE ELSE, OR USED, WITHOUT WRITTEN CONSENT OF E.F. BAVIS & ASSOC., INC.

**E.F. BAVIS & ASSOCIATES INC.**  
 201 GRANDIN RD.  
 MAINEVILLE, OH 45039  
 T: 513-677-0500 F: 513-677-0552 E: info@bavis.com www.bavis.com

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED  
**TRANSTRAX CAPTIVE CARRIER TYPICAL DIMENSIONS**